


IG-16GM

02&03 TYPE

REDUCTION RATIO	L	REDUCTION RATIO	L
1/4~1/5	15.05	1/198~1/850	26.00
1/14~1/29	18.70	1/867~1/4592	29.65
1/53~1/157	22.35		



外形尺寸 APPEARANCE SIZE

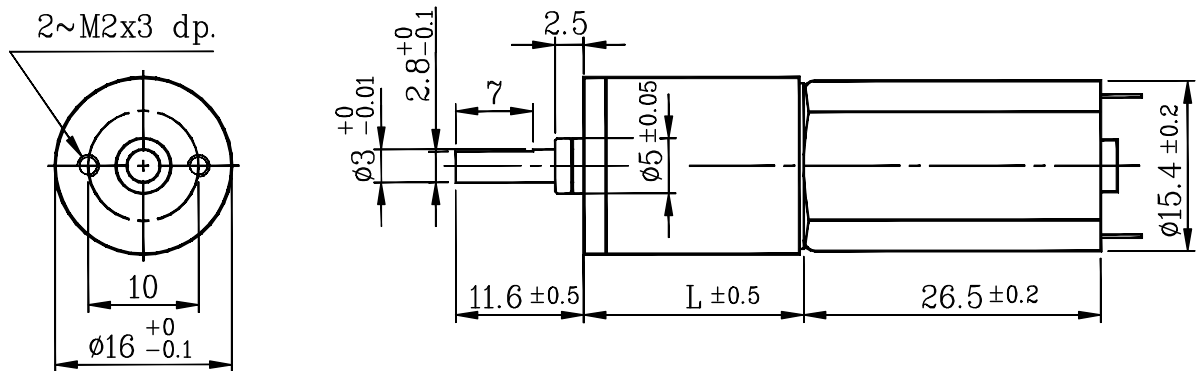

scale: 15:10

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/4	1/14	1/19	1/29	1/62	1/72	1/84	1/104	1/128	1/157	1/231	1/316	1/370	1/455	1/561	1/690	1/1014	1/1621	1/1996	1/3027
6V	定格扭力(g-cm) Rated torque	26	72	99	150	270	320	370	460	560	699	855	1165	1360	1680	2050	2500	3000	3000	3000	3000
	定格回轉數(rpm) Rated speed	1460	455	333	219	105	90	77	63	51	41	28	20	17	14	11.5	9.2	6.2	4.1	3.5	2.3
9V	定格扭力(g-cm) Rated torque	24	68	94	140	255	300	350	430	530	660	800	1100	1250	1550	1900	2400	2800	3000	3000	3000
	定格回轉數(rpm) Rated speed	1450	450	330	217	104	90	76	62	50	41	28	20	17	14	11.5	9.2	6.2	3.5	2.9	1.9

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
6	7.4	6550	≤ 160	8000	≤ 65	0.498	18
9	7.0	6500	≤ 110	8000	≤ 50	0.473	18

馬達單體特性圖 / MOTOR CHARACTERISTICS

